

AF SERIES


ALUMINIUM COMPRESSED AIR FILTERS

APPLICATIONS

- general industrial applications
- automotive
- electronics
- food and beverage
- chemical
- petrochemical
- plastics
- paint

operating pressure	16 bar
volume flow rate	60 to 2760 Nm³/h
connections	3/8" to 3"
operating temp. range	1,5 to 65°C
standard colour	RAL 5012

PRESSURE DROP INDICATORS

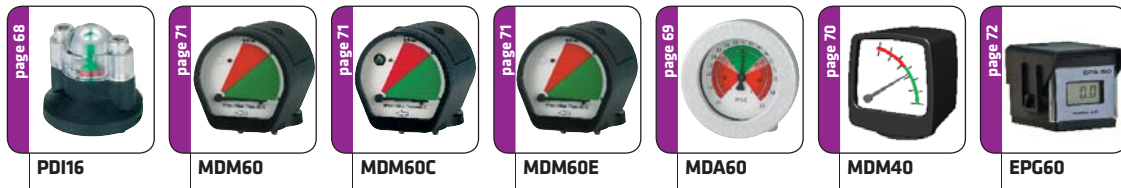

FILTER ELEMENTS

- B** 15 µm sintered brass
- P** 3 µm acrole fibres, cellulose
- R** 1 µm acrole fibres, cellulose
- M** 0,1 µm borosilicate micro fibres
- S** 0,01 µm borosilicate micro fibres
- A** activated carbon, borosilicate micro fibres
- A²** 0,1 µm activated carbon, borosilicate micro fibres
- H²** 0,1 µm hopcalite, borosilicate micro fibres

SIGHT GLASS



CONDENSATE DRAINS



DESCRIPTION

AF filter housings have been developed for high efficient removal of solid particles, water, oil aerosols, hydrocarbons, odour and vapours from compressed air⁽¹⁾ systems. To meet the required compressed air quality appropriate filter element (B, P, R, M, S, A, A², H²) must be installed into filter housing.

⁽¹⁾ For any other technical gas please contact producer or your local distributor.



TECHNICAL DATA - AF FILTERS

AF - FILTER ELEMENTS

Filter housing size	Pipe size	Max. oper. pressure	Flow rate at 7 bar(g), 20°C		Dimensions [mm]				Mass	B sintered 15 µm	P prefilter 3 µm	R prefilter 1 µm	M microfilter 0,1 µm	S microfilter 0,01 µm	A active carbon	A ² adsorption (act. carbon)	H ² catalyst (hopcalite)
			Nm ³ /h	scfm	A	B	C	D									
AF 0056	3/8"	16/232	60	35	187	88	20	60	0,7	06050 B15	06050 P	06050 R	06050 M	06050 S	06050 A	-	-
AF 0076	1/2"	16/232	78	46	187	88	20	60	0,7	07050 B15	07050 P	07050 R	07050 M	07050 S	07050 A	07050 A ²	07050 H ²
AF 0106	3/4"	16/232	120	70	257	88	20	80	0,8	14050 B15	14050 P	14050 R	14050 M	14050 S	14050 A	14050 A ²	14050 H ²
AF 0186	1"	16/232	198	116	263	125	32	100	1,8	12075 B15	12075 P	12075 R	12075 M	12075 S	12075 A	12075 A ²	12075 H ²
AF 0306	1"	16/232	335	197	363	125	32	120	2,5	22075 B15	22075 P	22075 R	22075 M	22075 S	22075 A	22075 A ²	22075 H ²
AF 0476	1 1/2"	16/232	510	300	461	125	32	140	2,5	32075 B15	32075 P	32075 R	32075 M	32075 S	32075 A	32075 A ²	32075 H ²
AF 0706	1 1/2"	16/232	780	459	640	125	32	160	3,2	50075 B15	50075 P	50075 R	50075 M	50075 S	50075 A	50075 A ²	50075 H ²
AF 0946	2"	16/232	1000	588	684	163	43	520	5,1	51090 B15	51090 P	51090 R	51090 M	51090 S	51090 A	-	-
AF 1506	2"	16/232	1500	882	935	163	43	770	7,1	76090 B15	76090 P	76090 R	76090 M	76090 S	76090 A	-	-
AF 1756	2 1/2"	16/232	1680	990	935	163	43	770	6,9	76090 B15	76090 P	76090 R	76090 M	76090 S	76090 A	-	-
AF 2006	3	16/232	2160	1270	795	240	59	630	12,9	51140 B15	51140 P	51140 R	51140 M	51140 S	51140 A	-	-
AF 2406	3	16/232	2760	1620	1000	240	59	780	14,0	75140 B15	75140 P	75140 R	75140 M	75140 S	75140 A	-	-
	quality class - solids (ISO 8573-1)	7	6	3	2	1	1 ³⁾	1 ³⁾	1 ³⁾								
	residual oil content [mg/m ³]	-	-	-	<0,1	<0,01	<0,005	<0,005	-								
	quality class - oils (ISO 8573-1)	-	-	-	2	1	1	0/1	-								
	pressure drop - new element [mbar / psi]	20 / 0,290	10 / 0,145	20 / 0,290	50 / 0,725	80 / 1,160	60 / 0,870	see spec.	see spec.								
	change filter cartridge at pressure drop [mbar / psi]	¹⁾	350 / 5,07	350 / 5,07	350 / 5,07	350 / 5,07	6 months ²⁾	6 months ²⁾	6 months ²⁾								
	filter material	sintered brass	acrylic fibres, cellulose		borosilicate micro fibres				borosilicate micro fibres								
								activ. carbon	activ. carbon	hopcalite							
	pleated version	-	✓	✓	✓	✓	-	✓	✓								
	wrapped version	-	-	-	-	-	✓	-	-								
	sintered version	✓	-	-	-	-	-	-	-								
min. operating temperature (°C / °F)	1,5 / 35	1,5 / 35	1,5 / 35	1,5 / 35	1,5 / 35	1,5 / 35	1,5 / 35	1,5 / 35									
max. operating temperature (°C / °F)	65 / 149	65 / 149	65 / 149	65 / 149	65 / 149	65 / 149	45 / 113	45 / 113									

CORRECTION FACTORS

Operating pressure [bar]	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Operating pressure [psi]	29	44	58	72	87	100	115	130	145	160	174	189	203	218	232
Correction factor	0,38	0,50	0,63	0,75	0,88	1	1,13	1,25	1,38	1,50	1,63	1,75	1,88	2,00	2,13

¹⁾ B filter element can be cleared with ultrasonic bath or with back flushing. Intervals of cleaning depends of application. If necessary replace filter element with new one.

²⁾ Filter elements "A, A², H²", must be changed periodically to suit application, but at least every 6 months. Activated carbon filters must not operate in oil saturated conditions.

³⁾ Valid if "S" filter cartridge is installed upstream.